



# Brisa® | Original



533-1359 Strawberry



533-5747 White

533-3277 Moon

533-3276 Wishbone

533-3275 Gravel

533-5802 Ash



533-3866 French Vanilla

533-3019 Birch

533-3822 Bone

533-3946 New Sand

533-3915 Putty



533-3863 Cream

533-3864 Desert Clay

533-3233 Honeycomb

533-3867 Golden

533-3051 Ginger




533-3823 Aztec

533-8202 Koi

533-8245 Cinnabar

533-3591 Caramel

533-3200 Peat

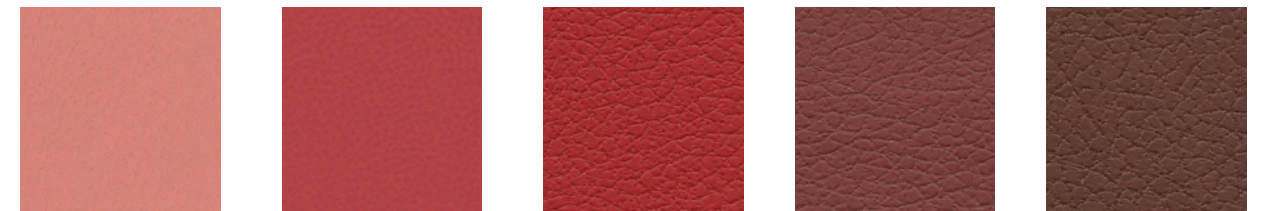


533-8203 Flamingo

533-1359 Strawberry

533-1383 Pompeian Red

533-1373 Salsa

533-3825 Canyon

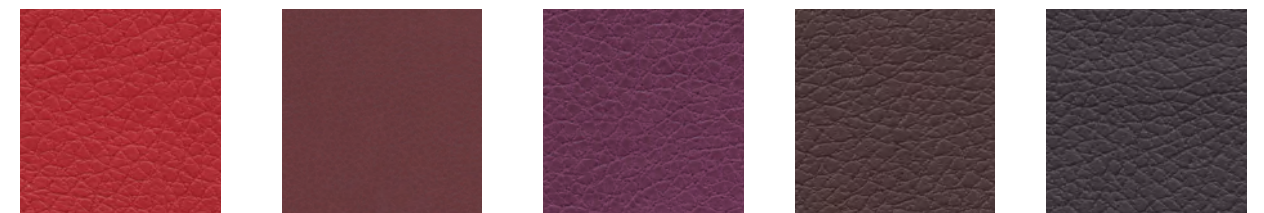


533-1344 Rose Red

533-1361 Beet Root

533-9374 Blossom

533-9400 Cabernet

533-9378 Abyss

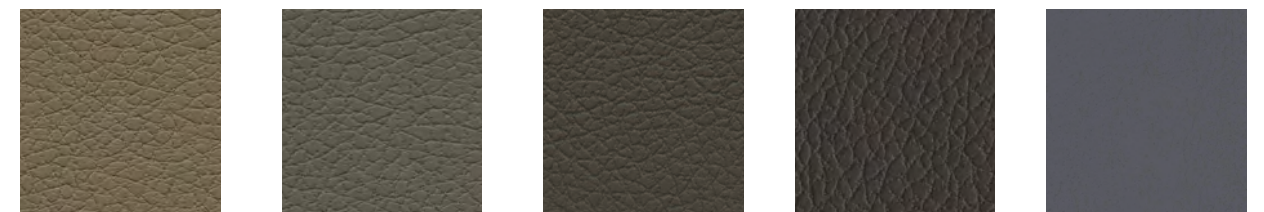

533-3914 Bark

533-3022 Shiitake

533-3913 Truffle

533-3023 Coffee Bean

533-9310 Hazy Lilac



533-5820 Quicksilver




533-3234 Cookie Dough




303-4510 Celery




533-4487 Sage




533-4488 Olive



533-2698 Sterling Blue




533-2697 Mineral



533-4448 Apple Green




533-4302 Esmeralda



533-4303 Seaweed



533-3272 Iceberg



533-2523 Turq



533-2696 Skyway




533-2645 Cambridge Blue




533-2621 Blue Sea




533-5703 Wrought Iron




533-2694 Night Navy



533-2620 Evening Blue



533-2683 Indigo



533-5749 Black Onyx



Breathable



Custom

# Brisa® | Original

## General Specifications

### Composition:

100% Polyurethane Surface  
65% Polyester, 35% Rayon Backing

### Weight:

Approx. 9.3 oz. Per Square Yard  
Approx. 315 Grams Per Square Metre

### Thickness:

Approx. 1.0 Millimetres

### Width:

54 Inches / 137 Centimetres

## Performance

### Abrasion:

ASTM D4157 / 200,000-300,000 Double Rubs (Wyzenbeek)\*  
BS 2543 / 120,000-160,000 Rubs (Martindale)\*

\*meets or exceeds

### Hydrolysis:

14+ Weeks  
ASTM D3690-02 SECT. 6.11 (Hydrolytic Stability)  
ISO 1419 Method C (Accelerated Ageing)

### Adhesion of Coating:

ASTM D751

### Tear Strength:

ASTM D2261

### Breaking Strength:

ASTM D5034

### Air Permeability:

ASTM D737

### Sound Absorption:

ASTM C423

## Colorfastness

### Light Fastness:

AATCC 16.3, 200 Hours, Grade 4-5

### Crocking:

AATCC 8, Class 5 Wet & Dry

## Flammability

### F/R Rating:

- ASTM E84 (Adhered) - Class A
- CA TB 117-2013 - Pass
- FMVSS 302 & 95/28 Annex IV - Pass
- NFPA 260 - Class 1
- UFAC - Class 1

### Other Tests\*:

- ASTM E84 (Unadhered)
- BS 5852 PT 0, 1 & 5 (Crib 5)
- BS 5867 Part 2 Type B
- BS 7175
- California Technical Bulletin 133
- FAR Specifications
- IMO A.652 (16)
- NFPA 701

\*These fabrics, when treated and/or used with other compatible furniture components, have been shown to perform well under these fire test conditions.

## Earth Friendly

### • GREENGUARD Certified

- Meets stringent VOC emission standards
- Promotes healthier indoor air quality
- Contributes towards satisfying credits under LEED® and level®, BIFMA

### • Compliant with Prop 65

### • No Conflict Minerals

### • No Flame Retardants (ex. Halogenated, Brominated)

### • No PBDEs (Polybrominated Diphenyl Ethers)

### • No Plasticizers, Heavy Metals, Stabilizers, Phthalates or Bisphenol A (BPA)

### • No POPs (Persistent Organic Pollutants)

### • No PVC (Polyvinyl Chloride)

### • No toxic by-products

### • Over 99% of solvents recaptured and recycled

For more information on our fabrics, cleaning and care instructions, please visit our website.

